

SEG Installation Instructions

Please read all instructions before installing graphics


- 1 Insert 8" to 10" of cover with SEG gasket into corner grooves of the frame.




- 2 Insert middles of each side into the groove and continue in an outward direction.




- 3 If SEG needs adjusting:
 - If there is bunching it can be worked in by pushing/pulling the gasket towards the corners.
 - If the gasket seems to long:
 - 1st, make sure gasket is completely flush in opposite corner
 - 2nd, it can be worked in by pushing/pulling the gasket towards the opposite end.

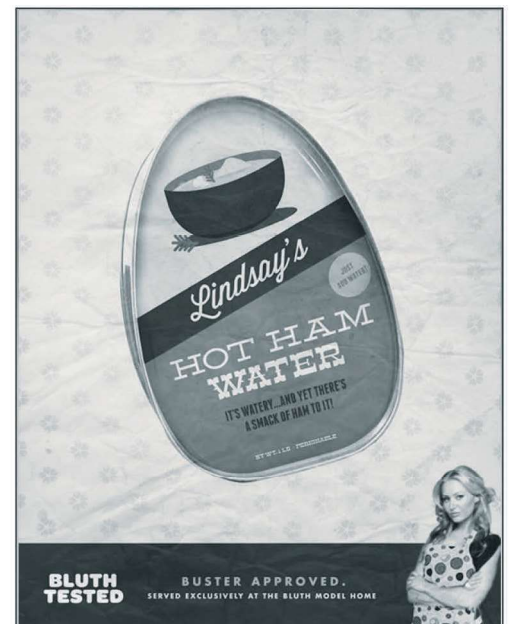

Gasket Detail

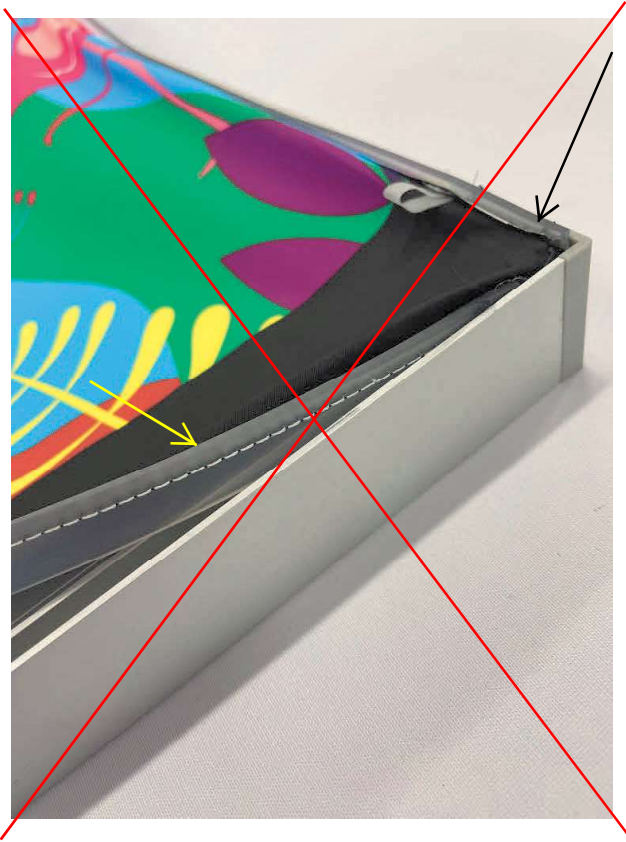

INCORRECT: Gasket is visible in frame edge.

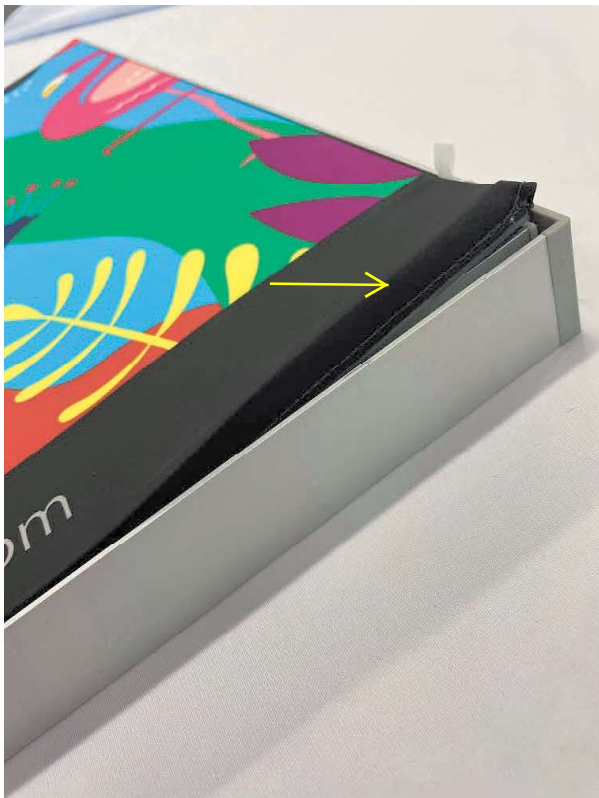

CORRECT: Gasket is wrapped by the graphic and hidden once installed in the frame.